

QNE-7080RV/7080RVW

4M Network IR Flateye Camera




Key Features

- Max. 4Megapixel (2592 x 1520) resolution
- 3.2~10mm (3.1x) motorized varifocal lens
- 0.2Lux@F1.6 (Color), 0Lux (B/W)
- Max. 20fps@4MP (H.265 / H.264), 30fps at all resolutions
- H.265, H.264, MJPEG codec support, Multiple streaming
- Day & Night, WDR (120dB)
- Tampering, Motion detection, Defocus detection
- Micro SD / SDHC / SDXC memory slot (Max. 128GB)
- Hallway view, WiseStream support
- IR Viewable length 30m
- LDC, PoE / 12V DC

Dimensions

Unit : mm (inch)

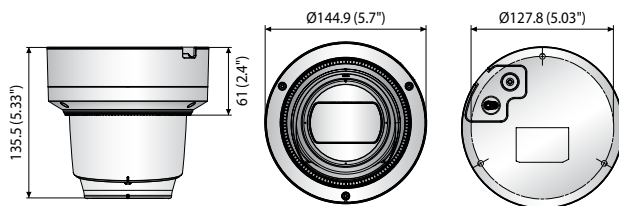

Accessories (Optional)



QNE-7080RV / 7080RVW

| | |
|-----------------------------------|--|
| VIDEO | |
| Imaging Device | 1 / 3" 4M CMOS |
| Total Pixels | 2,720(H) x 1,536(V) |
| Effective Pixels | 2,688(H) x 1,520(V) |
| Scanning System | Progressive |
| Min. Illumination | Color : 0.2Lux (30IRE), B/W : 0Lux (IR LED On) |
| S/N Ratio | 50dB |
| LENS TYPE | |
| Focal Length (Zoom Ratio) | 3.2 ~ 10mm (3.1x) motorized varifocal |
| Max. Aperture Ratio | F1.6 |
| Angular Field of View | H : 100.0°(Wide) ~ 30.5°(Tele) / V : 55.7°(Wide) ~ 18.3°(Tele) / D : 119.6°(Wide) ~ 35.3°(Tele) |
| Focus Control | Simple focus (Motorized V/F), Manual, Remote control via network |
| Lens Type | DC Auto Iris |
| Mount Type | Board type |
| PAN / TILT / ROTATE | |
| Pan / Tilt / Rotate Range | 0° ~ 350° / 0° ~ 70° / 0° ~ 360° |
| OPERATIONAL | |
| IR Viewable Length | 30m (98.43ft) |
| Camera Title | Off / On (Displayed up to 20 characters per line) - W / W : English / Numeric / Special characters - China : English / Numeric / Special / Chinese characters - Common : Multi-line (Max. 5), Color (Grey / Green / Red / Blue / Black / White), Transparency, Auto scale by resolution |
| Day & Night | True Day & Night |
| Backlight Compensation | Off / BLC / WDR |
| Wide Dynamic Range | 120dB |
| Digital Noise Reduction | SSNR (Off / On) |
| Motion Detection | Off / On (4ea polygonal zones) |
| Privacy Masking | Off / On (6ea rectangular zones) |
| Gain Control | Off / Low / Middle / High |
| White Balance | ATW / AWC / Manual / Indoor / Outdoor |
| LDC (Lens Distortion Correction) | Off / On (5 levels with min / max) |
| Electronic Shutter Speed | Minimum / Maximum / Anti flicker |
| Flip / Mirror | Flip / Mirror / Hallway view |
| Intelligent Video Analytics | Motion detection with metadata, Tampering, Defocus detection |
| Alarm I/O | Input 1 / Output 1 |
| Alarm Triggers | Motion detection, Tampering detection, SD card error, NAS error, Alarm input, Defocus detection |
| Alarm Events | File upload via FTP and E-mail, Local storage recording at event, Notification via E-mail, External output |
| Pixel Counter | Support (Plug-in viewer only) |
| NETWORK | |
| Ethernet | RJ-45 (10/100BASE-T) |
| Video Compression Format | H.265, H.264, MJPEG |
| Resolution | 2592 x 1520, 2560 x 1440 (16:9), 2304 x 1296, 1920 x 1080, 1280 x 1024, 1280 x 960, 1280 x 720, 1024 x 768, 800 x 600, 800 x 448, 720 x 576, 720 x 480, 640 x 480, 640 x 360, 320 x 240 |
| Max. Framerate | H.265 / H.264 : Max. 20fps at 4M, Max. 30fps at all resolutions, MJPEG : Max. 15fps |
| Smart Codec | WiseStream |
| Video Quality Adjustment | H.265 / H.264 : Target bitrate level control, MJPEG : Quality level control |
| Bitrate control method | H.265 / H.264 : CBR or VBR, MJPEG : VBR |
| Streaming Capability | Multiple streaming (Up to 3 profiles) |
| Audio I/O | Line-in |
| Audio Compression Format | G.711 u-law / G.726 selectable G.726 (ADPCM) 8KHz, G.711 8KHz, G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps |
| Audio Communication | Uni-directional audio |
| IP | IPv4, IPv6 |
| Protocol | TCP / IP, UDP / IP, RTP (UDP), RTP (TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL / TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1 / v2c / v3 (MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour |
| Security | HTTPS (SSL) Login Authentication, Digest Login Authentication IP Address Filtering, User access Log, 802.1X Authentication |
| Streaming Method | Unicast / Multicast |
| Max. User Access | 6 users at Unicast Mode |
| Edge storage | micro SD / SDHC / SDXC (Max. 128GB), NAS - Motion images recorded in the SD memory card can be downloaded - Manual recording at local PC |
| Application Programming Interface | ONVIF Profile S / G, SUNAPI (HTTP API) |
| Webpage Language | English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungary, Greek |
| Web Viewer | Supported OS : Windows 7, 8.1, 10, Mac OS X 10.9, 10.10, 10.11 Plug-in free Webviewer Supported Browser : Google Chrome 65, Firefox 59 (64bit only), MS Edge 41 Plug-in Webviewer Supported Browser : MS Explore 11, Apple Safari 11 * Mac OS X only |
| Central Management Software | SmartViewer |
| ENVIRONMENTAL | |
| Operating Temperature / Humidity | -30°C ~ +55°C (-22°F ~ +131°F) / Less than 90% RH * Start up should be done at above -20°C (-4°F) |
| Storage Temperature / Humidity | -30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH |
| Ingress Protection | IP66 |
| Vandal Resistance | IK10 |
| ELECTRICAL | |
| Input Voltage / Current | PoE (IEEE802.3af, Class3) / 12V DC |
| Power Consumption | Max. 8.6W (PoE), Max. 7.7W (DC12V) |
| MECHANICAL | |
| Color / Material | Ivory / Metal (QNE-7080RV), White / Metal (QNE-7080RVW) |
| Dimension | Ø144.9 x 135.5mm (Ø5.70" x 5.33") |
| Weight | 1.3Kg (2.87lb) |

* The latest product information / specification can be found at hanwha-security.com
* Design and specifications are subject to change without notice.
* Wisenet is the proprietary brand of Hanwha Techwin, formerly known as Samsung Techwin.